
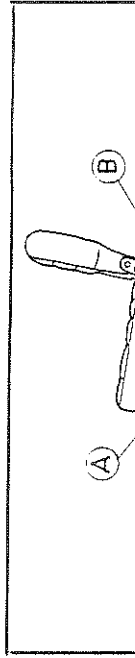
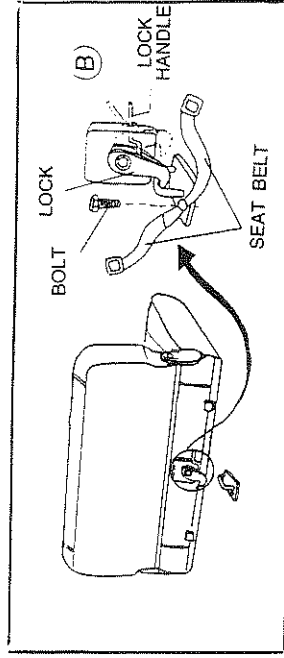


SUBJECT : ASSEMBLY MANUAL FOR FOLD & TUMBLE REAR SEAT

(A) FOLD & TUMBLE REAR SEAT INSTALLATION INSTRUCTIONS

1. Remove seat mounting bolts from floor.
2. Remove following parts from parts list.
 - a) 2 mounting bracket
 - b) 2 e-ring
3. Put hinge brackets through mounting tab.
4. Install e-ring on hinge brackets.
5. Align mounting brackets over holes in floor and securely tighten with seat mounting bolts.

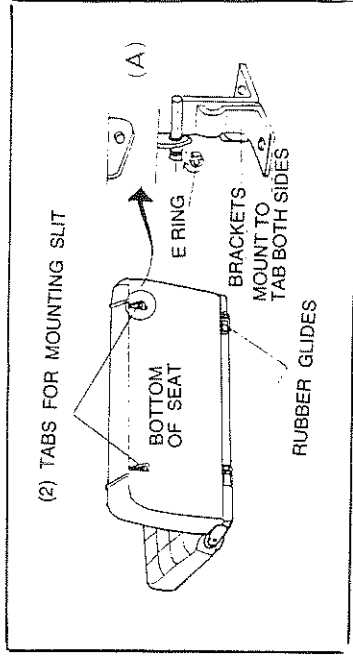

(B) INSTALLATION - REAR SEAT LOCK

1. Remove seat belt anchor bolt from floor.
2. Position lock underneath seat belt & eyelets as shown in diagram.
3. Reinstall seat belt anchor bolt through seat belt eyelets and seat lock do not tighten yet.
4. Align seat lock with stricker so that seat locks when seat is pushed down into position.